

S VAGE DESIGN

MADDOX HANGING RAIL PRODUCT PROFILE



ENGINEERED BEAUTY
SINCE 1910 / SYD - AUS



MADDOX HANGING RAIL


PROFILE

A refined hanging rail designed for kitchens, laundries, and wardrobes. With precise projections and lengths available in 100mm increments, it offers a flexible solution for hanging garments, utensils, or accessories. The clean, architectural form ensures seamless integration across residential and retail interiors. The Maddox System is a carbon neutral product.

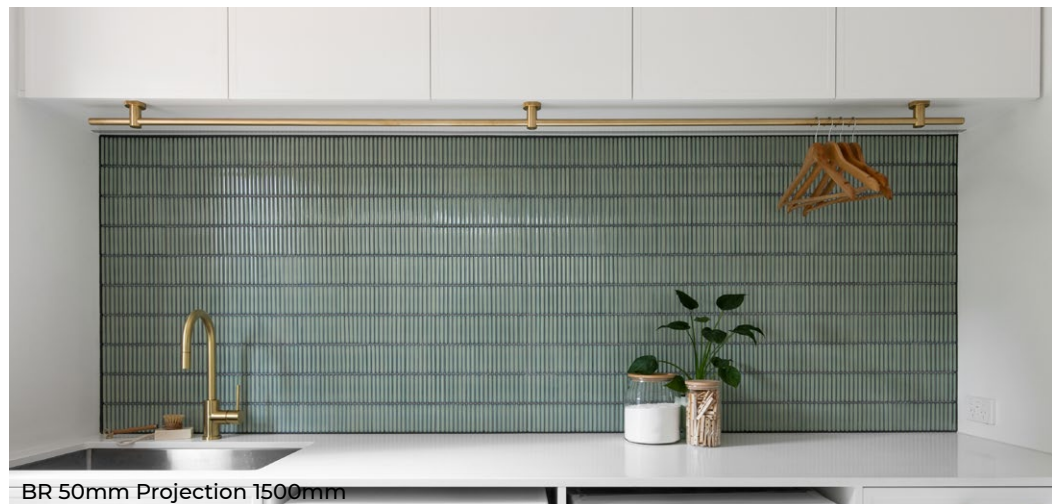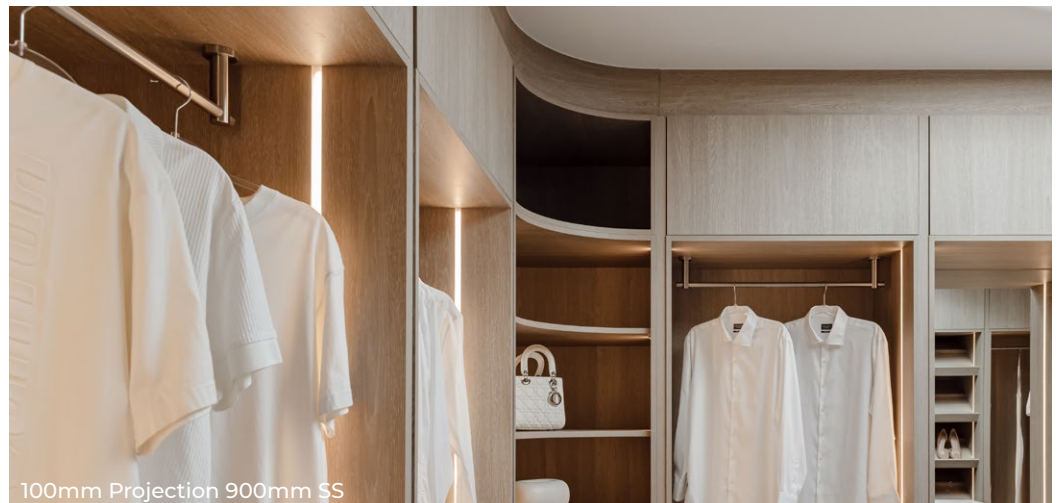

FINISHES

Choose from our four signature finishes*

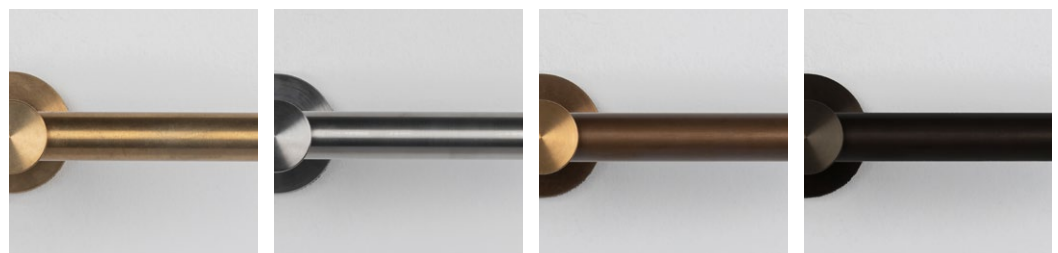

Brass (BR)

Stainless Steel (SS)

Aged Bronze (BO)


Blackened Brass (BB)

* Our metals are all living finishes. Find out more here - savagedesign.com.au/portfolio/living_finishes/

DIMENSIONS

Projection is measured from mounting surface to the center of the rail.

PROJECTION

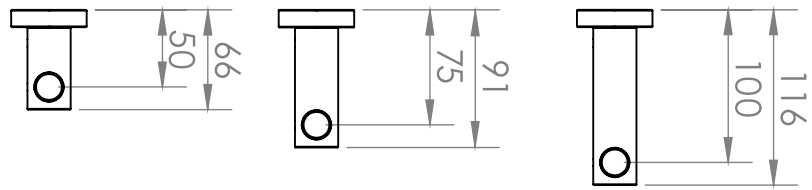



50mm PROJECTION

75mm PROJECTION

100mm PROJECTION

LENGTH

Available in 100mm increments, our rails are made from solid material and feature our dial finish on each end.

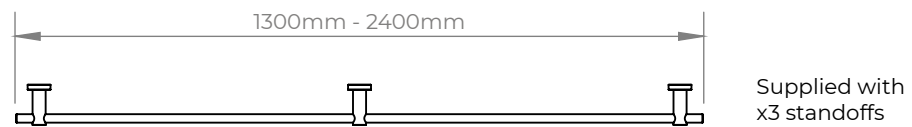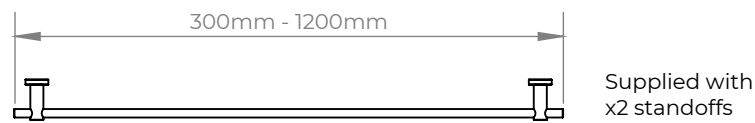


DIAMETERS


Standoff and rail dimensions

Standoffs are movable and can be placed anywhere along the rail.


Max 900mm between Standoffs. Max overhang is 300mm. All supplied standoffs must be used.

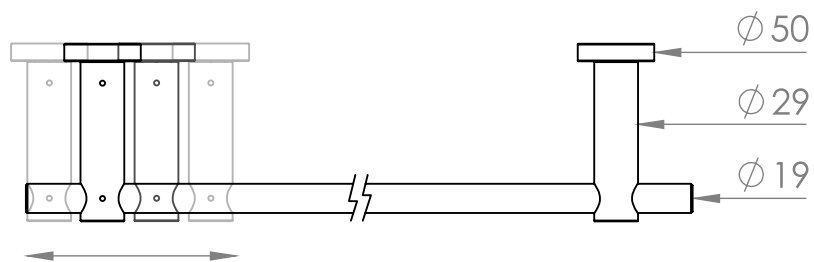

INSTALLATION OPTIONS

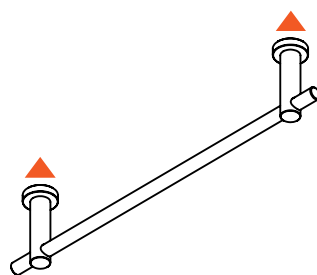

CEILING / JOINERY

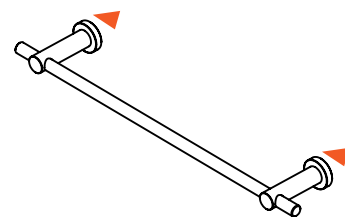


WALL / JOINERY



100mm Projection 900mm BO



100mm Projection 2400mm BR

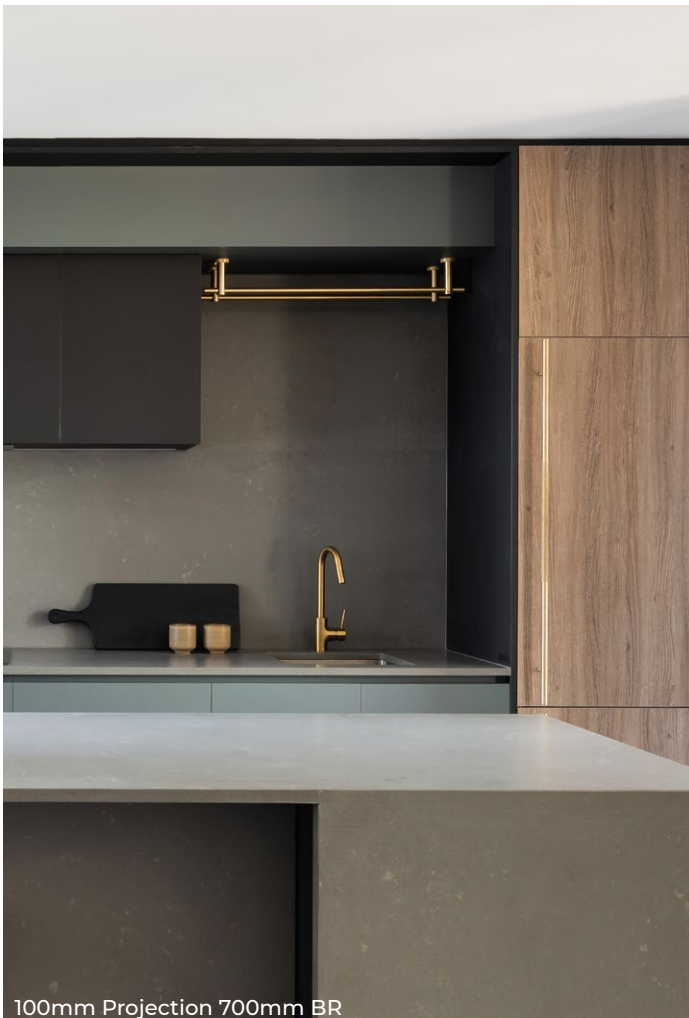

100mm Projection 700mm BR



100mm Projection 900mm BR

FAQ'S

How much room do I need between the rail and my bench top?

We recommend a minimum distance of 900mm between the rail and the surface below.

Can I cut down the rail on site?

It is not recommended that the our rails be cut down on site.

Our rails are made from solid material and feature our dial finish on each end.

Tailored lengths can be quoted on request.

What is the position of the standoffs?

Our standoffs can be moved to suit the application. They slide along the rail and are locked into position with the supplied grub screw.


The maximum distance recommend between standoffs is 900mm center to center with a maximum overhang of 300mm. All supplied standoffs must be used.

How much weight can a rail hold?

300mm - 1200mm: 50 kgs
1300mm - 2400mm: 75 kgs

The Maddox Bush Flange is screw fixed to its position. Screws provided are 8G x 20mm to suit most applications. Longer screws, wall plugs or wall anchors may be needed at installers discretion.

Maddox Bush Flange
Always supplied in Brass

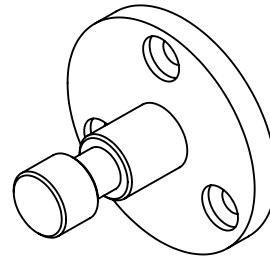

What surface can I mount the rail to?

Whatever Maddox is fixed to, it must have sufficient structure to take the weight of the Maddox unit and items being placed on it.

Suitable surfaces may include Timber, Ply or Engineered Timbers, Masonry and Concrete.

CAUTIONS

Plasterboard – Requires sufficient timber battens or timber paneling

Tile – Maddox can be fitted to tiles. There needs to sufficient rigid structure behind the tiled surface for it to be fixed to.

Maddox can not be fixed directly to glass or mirror.

If you have any further questions please contact our sales team
Email - hello@savagedesign.com.au
Call - +61 2 9681 7888 (Mon - Fri 9am - 5pm AEST)



SHOWROOM - Surry Hills
FACTORY - Fairfield
New South Wales, Australia

hello@savagedesign.com.au



S V A G E DESIGN

ENGINEERED BEAUTY
SINCE 1910 / SYD - AUS